




WALLACE CRANES PORTABLE CRANE CANTILEVER CHART

GANTRY MODEL NUMBER: A0T12-A15AC
 I-BEAM: A8"X6.40#/'X15'
 I-BEAM LENGTH (OVERALL SPAN): 180 Inches
 MAXIMUM CANTILEVER DISTANCE (A): 45 Inches
 GANTRY RATED CAPACITY: 1000 Lbs.
 MAXIMUM CANTILEVERED LOAD (B): 600 Lbs.
 GANTRY WEIGHT: 310 Lbs.
 I-BEAM WEIGHT: 98 Lbs.

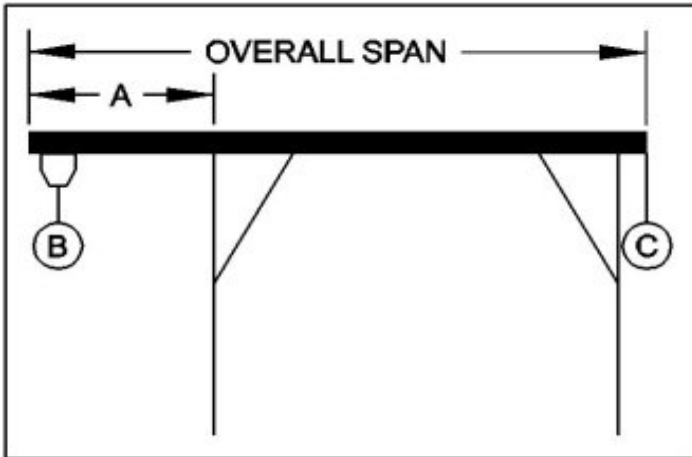

PROPER CANTILEVER PROCEDURES
 Required counterweight should not be supported by gantry caster frame.

Load and trolley should be able to freely traverse the I-beam through the main legs and brace legs of the gantry.

REQUIRED COUNTERWEIGHT AT [C]

A	B	B	B	B	B	B
IN	100	200	300	400	500	600
FEET	LBS.	LBS.	LBS.	LBS.	LBS.	LBS.
1	0	0	0	0	0	0
2	0	0	0	0	6	37
3	0	0	7	57	107	157
3.75	0	0	61	128	194	261