




## WALLACE CRANES PORTABLE CRANE CANTILEVER CHART

GANTRY MODEL NUMBER: A2T6-A10AC  
 I-BEAM: A6" X 4.30#/' X 10'  
 I-BEAM LENGTH (OVERALL SPAN): 120 Inches  
 MAXIMUM CANTILEVER DISTANCE (A): 30 Inches  
 GANTRY RATED CAPACITY: 2000 Lbs.  
 MAXIMUM CANTILEVERED LOAD (B): 1200 Lbs.  
 GANTRY WEIGHT: 214.5 Lbs.  
 I-BEAM WEIGHT: 44 Lbs.

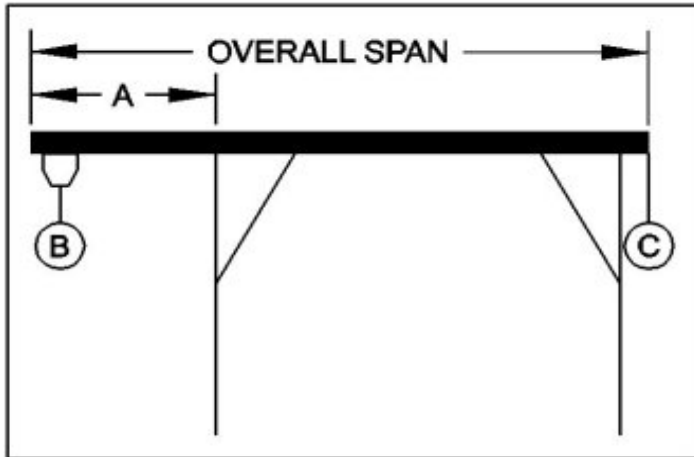

**PROPER CANTILEVER PROCEDURES**  
 Required counterweight should not be supported by gantry caster frame.

Load and trolley should be able to freely traverse the I-beam through the main legs and brace legs of the gantry.

### REQUIRED COUNTERWEIGHT AT [C]

A	B	B	B	B	B	B
IN	200	400	600	800	1000	1200
FEET	LBS.	LBS.	LBS.	LBS.	LBS.	LBS.
1	0	0	28	72	117	161
2	0	98	198	298	398	498
2.5	33	166	300	433	566	700